



## 3000W1000B

- 3000 Watts CW
- 80MHz–1000MHz

### Features

The Model 3000W1000B is a self-contained, air-cooled, broadband, completely solid-state amplifier designed for applications where instantaneous bandwidth and high gain are required. Push-pull circuitry is utilized in all high power stages in the interest of lowering distortion and improving stability. The Model 3000W1000B, when used with an RF sweep generator, will nominally provide over 3000 watts of RF power.


The Model 3000W1000B is equipped with a Digital Control Panel (DCP) which provides both local and remote control of the amplifier. The DCP uses a color LCD touch screen and a single rotary knob to offer status reporting and control capability. The display provides operational presentation of Forward Power and Reflected Power plus amplifier status. Special features include a gain control, internal automatic level control (ALC) with front panel control of the ALC threshold, forward and reflective RF sample ports for precise power measurements and RF output level protection. Protection is provided by DC current level sensing of all output stages.

All amplifier control functions and status indications are available remotely in GPIB/IEEE-488 format and RS-232 hardware and fiber optic, USB and Ethernet. The buss interface connector is located on the back panel and positive control of local or remote operation is assured by a keylock on the front panel of the amplifier.

Housed in a single equipment rack, the 3000W1000B provides readily available RF power for typical applications such as RF susceptibility testing, antenna and component testing, watt meter calibration, and as a driver for frequency multipliers and higher power amplifiers. A safety interlock can be implemented via a rear panel connector.

The 3000W1000B has the ability to be upgraded at a later date to the 4000W1000B, 4000 watt amplifier.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

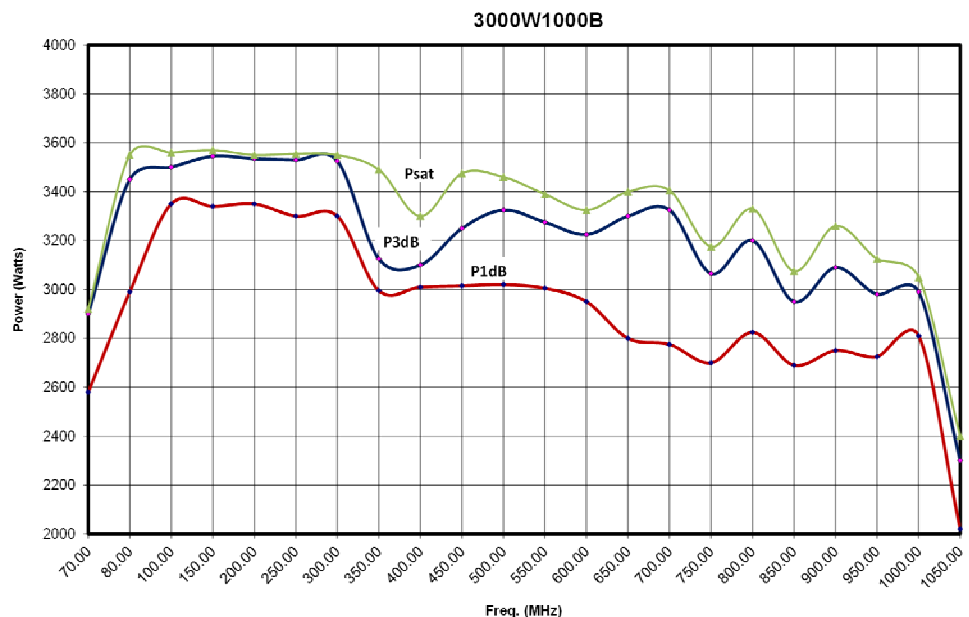

AR RF/Microwave  
Instrumentation  
160 School House Rd  
Souderton, PA 18964  
215-723-8181

For an applications engineer call: 800.933.8181

[www.arworld.us](http://www.arworld.us)



# 3000W1000B

- 3000 Watts CW
- 80MHz–1000MHz

## Specifications

**RATED OUTPUT POWER:** 2800 watts minimum

**INPUT FOR RATED OUTPUT:** 1.0 milliwatt maximum

**POWER OUTPUT @ 3 dB compression:**

Nominal 3000 watts, 2600 watts min up to 500 MHz, 2400 watts from 500 to 1000 MHz

**POWER OUTPUT @ 1 dB compression:**

Nominal 2500 watts, 2250 watts min up to 500 MHz; 1850 watts min from 500 to 1000 MHz

**FLATNESS:** ±2.0 dB maximum; ±1.5 dB typical

**FREQUENCY RESPONSE:** 80–1000 MHz instantaneously

**GAIN (at maximum setting):** 64.8 dB minimum

**GAIN ADJUSTMENT (continuous range):** 25 dB minimum

**INPUT IMPEDANCE:** 50 ohms, VSWR 1.5:1 maximum; 1.3:1 typical

**OUTPUT IMPEDANCE:** 50 ohms nominal

**MISMATCH TOLERANCE:** 100% of rated power without foldback up to 6.0:1 mismatch above which may limit to 1500 watts reflected power. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. \*See Application Note #27.

**MODULATION CAPABILITY:** Faithfully reproduces AM, FM, or Pulse modulation appearing on input signal.

**HARMONIC DISTORTION:** Minus 20 dBc maximum at 2400 watts, -20 dBc typical @ 3000 watts

**THIRD ORDER INTERCEPT POINT:** 72 dBm typical

**NOISE FIGURE:** 8 dB maximum, 6 dB typical

**PRIMARY POWER (specify voltage):**

200-240 VAC Delta connected (4-wire)

360-435 VAC Wye connected (5-wire)

50/60 Hz, three phase, 14kVA

### CONNECTORS

RF Input: Type N female, rear panel

RF Output: Type 1-5/8 female, rear panel

Forward sample: Type N female, front (-70 dBc)

Reverse sample: Type N female, front (-70 dBc)

Remote Interfaces:

IEEE-488 24-pin female

RS-232 9-pin Subminiature D, female

Fiber Optic ST Conn Tx and Rx RS-232

USB 2.0 Type B

Ethernet RJ-45

Safety Interlock: 15-pin Subminiature D, rear panel


**COOLING:** Forced air (self contained fans), enters front and bottom

**WEIGHT (approximate):** 364 kg (800 lb)

**SIZE (W x H x D):** (2 joined cabinets) 111.8 x 177.8 x 97.6 cm (44 x 70 x 38.4 in)

**EXPORT CLASSIFICATION:** EAR99

## Graphs

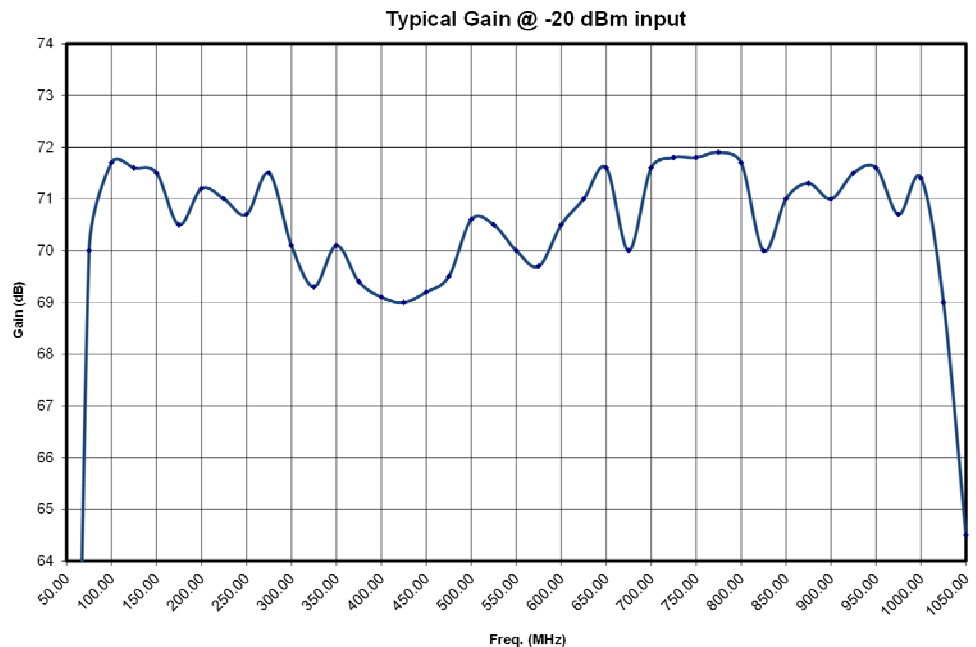

### 3000W1000B

- 3000 Watts CW
- 80MHz-1000MHz

