



1000TP8G18

- Pulse Amplifier
- M1-M22
- 1000 Watts
- 7.5GHz-18GHz

Features

The Model 1000TP8G18 is a self contained, forced air cooled, broadband traveling wave tube (TWT) microwave amplifier designed for pulse applications at low to moderate duty factors where instantaneous bandwidth, and high gain are required. A reliable TWT subsystem provides a conservative 1000 watts minimum peak RF pulse power at the amplifier output connector. Stated power specifications are at the fundamental frequency.

The amplifier's front panel digital display shows forward and reflected average power output or forward and reflected peak power, plus extensive system status information accessed through a series of menus via soft keys. Status indicators include power on, warm-up, standby, operate, faults, excess average or peak reflected power warning and remote. Standard features include a built-in IEEE-488 (GPIB) interface, 0 dBm input, TTL Gating, VSWR protection, gain control, RF output sample port, auto sleep, plus monitoring of TWT helix current, cathode voltage, collec-


tor voltage, heater current, heater voltage, baseplate temperature and cabinet temperature. Modular design of the power supply and RF components allow for easy access and repair. Use of a switching mode power supply results in significant weight reduction.

Housed in a stylish contemporary cabinet, the Model 1000TP8G18 provides readily available pulsed RF power for a variety of applications in Test and Measurement, (including EMC RF pulse susceptibility testing), Industrial and University Research and Development, and Service applications. AR also offers a broad range of amplifiers for CW (Continuous Wave) applications.

The export classification for this equipment is 3A999.d. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

See Model Configurations for alternative packaging and special features.

1000TP8G18 TYPICAL POWER OUTPUT

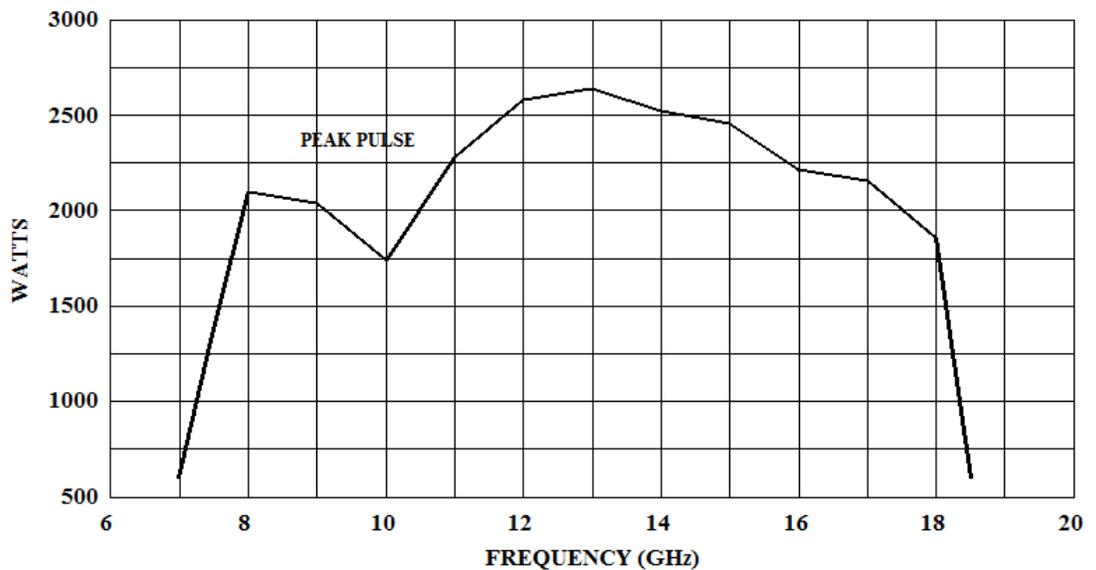

AR RF/Microwave
Instrumentation
160 School House Rd
Souderton, PA 18964
215-723-8181

For an applications engineer call: 800.933.8181

www.arworld.us



1000TP8G18

- Pulse Amplifier
- M1-M22
- 1000 Watts
- 7.5GHz-18GHz

Specifications

Power (Fundamental), Peak Pulse, @ Output Connector: Nominal, 1800 watts; Minimum, 1000 watts

FLATNESS: ± 8 dB maximum, equalized for ± 3 dB maximum at rated power

FREQUENCY RESPONSE: 7.5 - 18 GHz instantaneously

INPUT FOR RATED OUTPUT: 1.0 milliwatt maximum

GAIN (at maximum setting): 60 dB minimum

GAIN ADJUSTMENT (continuous range): 35 dB minimum

INPUT IMPEDANCE: 50 ohms, VSWR 2.5:1 maximum

OUTPUT IMPEDANCE: 50 ohms, VSWR 2.5:1 typical

MISMATCH TOLERANCE: Output pulse width foldback protection at peak reflected power exceeding 500 watts. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. May oscillate with unshielded open due to coupling to input. Should not be tested with connector off.

PULSE CAPABILITY:

| | |
|------------------------|--|
| Pulse Width | 0.07 – 100 microseconds. |
| Pulse Rate (PRF) | 100 kHz maximum |
| Duty Cycle | 4% maximum. |
| RF Rise and Fall Delay | 30 ns max (10% to 90%). 300 ns maximum from pulse input to RF 90% |
| Pulse Width Distortion | ± 30 ns maximum (50% points of output pulse width compared to 50% points of input pulse width) |
| Pulse Off Isolation | 80 dB minimum, 90 dB typical |
| Pulse Input | TTL level, 50 ohm nominal termination |

NOISE POWER DENSITY:

| | |
|-------------|---|
| (pulse on) | Minus 57 dBm/Hz (maximum), Minus 58 dBm/Hz (typical) |
| (pulse off) | Minus 140 dBm/Hz (typical) |

HARMONIC DISTORTION: Minus 2 dBc maximum, Minus 3 dBc typical

PRIMARY POWER: 190-260 VAC, single phase, 50/60 Hz, 1.5 KVA maximum

CONNECTORS:

| | |
|--------------------------------|--|
| RF input: | Type N female, rear panel |
| RF output: | Type WRD 750D24 waveguide flange, rear panel |
| RF output forward sample port: | Type N female, rear panel |
| Pulse input: | Type BNC female, rear panel |
| GPIB: | IEEE-488 female, rear panel |
| Interlock: | DB-15 female, rear panel |

ENVIRONMENTAL:

Operating Temperature: 0° to +40°C
Storage Temperature: -40° to +70°C

COOLING: Forced air (self contained fans), air entry and exit in rear.

WEIGHT AND SIZE: See Model Configurations

EXPORT CLASSIFICATION: 3A999.d

1000TP8G18

- Pulse Amplifier
- M1-M22
- 1000 Watts
- 7.5GHz-18GHz

Model Configurations

- E** Must select one enclosure type from the following [E1 or E2 or E2S]:
- E1** removable outer enclosure, size 19.8 x 10 x 27 in., 50.3 x 25.4 x 69 cm.
- E2** without outer enclosure, size 19 x 8.75 x 27 in, 48.3 x 22.2 x 69 cm.
- E2S** without outer enclosure; slides and front handles installed for rack mounting.
- S** May select a special feature (extra cost) from the following [(S1R or S1F) and/or S2K} or S3P]
- S1R** Reflected sample port on rear panel, type N female connector. Forward and reflected sample port calibration data supplied on disk in Excel format at 51 points, evenly spaced over the specified frequency range.
- S1F** Reflected sample port on front panel, type N female connector. Input and forward sample port on front panel. Forward and reflected sample port calibration data supplied on disk in Excel format at 51 points, evenly spaced over the specified frequency range.
- S2K** Supplied with two TF type externally mountable harmonic filters and a switch kit that allows user to select an appropriate filter band, high or low, via this TWTA. Insertion loss when used with filters is maximum 1.5 dB. See TF type Filter specification table below. Dimensions and enclosures are for TWTA's only without kits and filters.
- S3P** RF output waveguide changed to WRD650. Frequency range extended down to 6.5 GHz. 6.5-7.5 GHz, 1000 watts pulse
Flatness: equalized for ± 5 dB maximum from 6.5 -18 GHz at rated power. Reflected sample port on rear panel, type N female connector.
- S4R** Remote Interface: Change remote interface to Ethernet from standard IEEE-488 GPIB.
- S5C** 5m power cable, supply end unterminated, amplifier end fitted with MS3106F18-115 connector and appropriate mating connector on rear of amplifier as power inlet.

S6D Duty Cycle=6%.

| Model Number | Weight | Features | |
|--------------|-----------------|----------|---------------|
| | | E | S |
| 1000TP8G18 | 52 kg (115 lbs) | E1 | - |
| M1 | 39 kg (85 lbs) | E2 | |
| M2 | 41 kg (90 lbs) | E2S | - |
| M3 | 52 kg (115 lbs) | E1 | S1R |
| M4 | 39 kg (85 lbs) | E2 | S1R |
| M5 | 41 kg (90 lbs) | E2S | S1R |
| M6 | 52 kg (115 lbs) | E1 | S1F |
| M7 | 39 kg (85 lbs) | E2 | S1F |
| M8 | 41 kg (90 lbs) | E2S | S1F |
| M9 | 62 kg (135 lbs) | E1 | S2K |
| M10 | 48 kg (105 lbs) | E2 | S2K |
| M11 | 50 kg (110 lbs) | E2S | S2K |
| M12 | 62 kg (135 lbs) | E1 | S2K, S1R |
| M13 | 48 kg (105 lbs) | E2 | S2K, S1R |
| M14 | 50 kg (110 lbs) | E2S | S2K, S1R |
| M15 | 62 kg (135 lbs) | E1 | S2K, S1F |
| M16 | 48 kg (105 lbs) | E2 | S2K, S1F |
| M17 | 50 kg (110 lbs) | E2S | S2K, S1F |
| M18 | 52 kg (115 lbs) | E1 | S3P |
| M19 | 39 kg (85 lbs) | E2 | S3P |
| M20 | 41 kg (90 lbs) | E2S | S3P |
| M21 | 39 kg (85 lbs) | E2 | S3P, S4R |
| M22 | 41 kg (90 lbs) | E2S | S4R, S5C, S6D |

| S2K - TF TYPE FILTER SPECIFICATIONS | | | | | | | | | | | | |
|-------------------------------------|--|-----------------|-------------------------|-------------------|--------------------|--|-----------------------------|-----------------------------|-----------------------------|--------------------------|-----------------------------------|-------------------------------------|
| Micro-wave Filter Model | For Use with AR TWTA Model | Pass Band (GHz) | Insertion Loss (dB max) | Reject Band (GHz) | Rejection (dB min) | Power (fundamental & harmonic, watts, max) | Input connector | Output connector | Size L x W x D (cm, in max) | Weight (kg, lbs typical) | Input VSWR in Pass band (typical) | Input VSWR in Reject band (typical) |
| filter 1 | 1000TP8G18 with WRD750D24 waveguide flange, requires two filters | 7.5-12.4 | 0.5 | 15-36 | 25 | 150 & 100 average, 3000 & 2000 peak | WRD750 D24 waveguide flange | WRD750 D24 waveguide flange | 30 x 18 x 15 12 x 3 x 6 | 4.5, 10 | 1.3:1 | 2.5:1 |
| filter 2 | | 12.4-18 | 0.5 | 24.8-36 | 25 | 150 & 100 average, 3000 & 2000 peak | | | 30 x 18 x 15 12 x 3 x 6 | 4.5, 10 | 1.3:1 | 2.5:1 |