



Amplifiers

Model 1500/1000SP1z2G3z1

Features:

- 1500 W Pulse, 1.2 – 1.4 GHz
- 1000 W Pulse, 2.7 – 3.1 GHz
- Class B design
- Full VSWR tolerant
- CE & RoHS Compliant
- High Efficiency

Applications:

- EMC Test applications
- RADAR
- Science

To view our full amplifier portfolio visit:

www.arworld.us/amplifiers

AR RF/Microwave Instrumentation
 160 Schoolhouse Rd
 Souderton, PA 18964
 215.723.8181
 info@arworld.us
 www.arworld.us
 ISO 9001:2015 Certified
 ISO 17025:2017 Accredited

The Model 1500/1000SP1z2G3z1 is a self-contained, dual band forced-air-cooled, broadband solid-state microwave amplifier designed for pulse applications at low duty factors where instantaneous bandwidth and high gain are required. The unit provides a conservative 1000 watts minimum peak RF pulse power at the amplifier output connector. Stated power specifications are at the fundamental frequency.



The Model 1500/1000SP1z2G3z1 is equipped with a Digital Control Panel (DCP) which provides both local and remote control of the amplifier. The DCP uses a color LCD touch screen and a single rotary knob to offer status reporting and control capability. The display provides Forward Power and Reflected Power values plus amplifier status. Special features include a gain control and RF output level protection.

All amplifier control functions and status indications are available remotely in GPIB/IEEE-488 format, RS-232 serial and Ethernet. The bus interface connector is located on the back panel and positive control of local or remote operation is assured by a keylock on the front panel of the amplifier.

Housed in a stylish contemporary cabinet, the amplifier provides readily available pulsed RF power for a variety of applications in Test and Measurement, (including EMC RF pulse susceptibility testing), Industrial and University Research and Development, and Service applications. AR also offers a broad range of amplifiers for CW (Continuous Wave) applications.

The export classification for this equipment is 3A999.d. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.



Model 1500/1000SP1z2G3z1

- 1500/1000 W
- 1.2 – 1.4 GHz/2.7 - 3.1 GHz

Electrical Specifications					
Parameter	Symbol	Minimum	Typical	Maximum	Unit
Rated Power Output (1.2 – 1.4 GHz)	PSAT	1500			W
Rated Power Output (2.7 – 3.1 GHz)	PSAT	1000			W
Input for Rated Output	Pin			1	mW
				0	dBm
Pulse Droop-50 μ s pulse @ rated power				-0.5	dB
Operating Frequency – Low Band	BW	1.2		1.4	GHz
Operating Frequency – High Band	BW	2.7		3.1	GHz
Gain (Small Signal) – Low Band		61.8			dB
Gain (Small Signal) – High Band		60			dB
Gain Reduction Adjustment (when below compression)		20			dB
Flatness (@ rated power)	ΔG		± 1	± 2	dB
Input Impedance	Z in		50		Ohm
				2.0:1	VSWR
Output Impedance	Z out		50		Ohm
Noise Figure	NF			≤ 8	dB
Harmonic Distortion	H2, H3			≤ -30	dBc
Spurious				≤ -60	dBc
Power Consumption	PD			750	W

Absolute Maximum Rating					
Exceeding any of the limits listed here may result in permanent damage to the device.					
Parameter	Minimum	Typical	Maximum	Unit	
RF Drive			+13	dBm	
RF Load		1:1	3: 1 @ rated power	VSWR	
RF Load Reflected			25	%	
Will operate without damage or oscillation when connected to any load impedance. Alarm and protection above 375 W (low band)/250 W (high band) reflected power (i.e., load VSWR > 3:1 @ 1.5 kW (low band)/1 kW (high band); VSWR > 6:1 @ 750 W (low band)/500 W (high band)					
AC Power	100		264	VAC	
AC Power	50		60	Hz	
Ambient Temperature	+5	+25	+40	$^{\circ}$ C	
Storage Temperature	-20		+50	$^{\circ}$ C	
Altitude			2000	m	
Shock/Vibration	Normal Truck Transport				



Model 1500/1000SP1z2G3z1

- 1500/1000 W
- 1.2 – 1.4 GHz/2.7 - 3.1 GHz

Mechanical Specifications		
Parameters	Typical	Unit
Dimensions (With Cabinet) (W x H x D)	50.3 x 19.8 x 71.4	cm
	19.8 x 7.8 x 28.1	in
Dimensions (No Cabinet) – 4U for 19" Rack	48.3 x 17.8 x 68.2	cm
	19 x 7 x 26.85	in
Weight (With Cabinet)	40	kg
	87	lb
Weight (No Cabinet)	35	kg
	77	lb
Cooling	Forced air (self-contained fans)	
Acoustical Noise Measured @ 1 Meter	67	dBA

Regulatory Compliance	
Type	Standard
EMC	EMC Directive 2014/30/UE
Safety	Low Voltage Directive 2014/35/UE
RoHS	Directive 2011/65/EU
Export	3A999.d

Connector Interfaces	
Function	Type
RF Input	N, female, front
RF Output	N, female, front
RF Forward Sample	N, female, rear
RF Reverse Sample	N, female, rear
Pulse Input	BNC, female, rear
IEEE-488	24-pin
RS-232	9 pin subminiature D
Ethernet	RJ-45
Interlock	15-pin subminiature D
AC	IEC C20/IEC C19

Band selection is done at the input by an internal switch. Each band has its own output connector. An internal electromechanical switch installed in series and two external coaxial cables supplied allow a single output for the two channels. Using this device, the power loss expected in each channel is < 0.5 dB in Band 1 and < 0.7 dB in Band 2.



Model 1500/1000SP1z2G3z1

- 1500/1000 W
- 1.2 – 1.4 GHz/2.7 - 3.1 GHz


Pulse Capability	
Parameter	Value
Pulse Width	0.1 – 50 μ s
Pulse Rate (PRF)	50 kHz maximum
Duty Cycle	6% maximum
RF Rise and Fall	30 ns maximum (10 - 90 %)
Delay	\leq 1 μ s from pulse input to RF 90%
Pulse Width Distortion	\pm 25 ns maximum (difference between Pulse input gate and RF pulse)
Pulse Off Isolation	60 dB minimum
Pulse Input	+5V nominal / 50 ohms internal termination

Ordering Options

Model Number	RF Input	RF Output
1500/1000SP1z2G3z1	N (f), front	N (f), front
1500/1000SP1z2G3z1M1	N (f), rear	N (f), rear (power output loss of \leq 0.3dB)
1500/1000SP1z2G3z1M2	Same as 1500/1000SP1z2G3z1 with enclosure removed for rack mounting	
1500/1000SP1z2G3z1M3	Same as 1500/1000SP1z2G3z1M1 with enclosure removed for rack mounting	

Contact your AR RF/Microwave Instrumentation Sales Associate for specific model configuration pricing.

Envelope Drawing

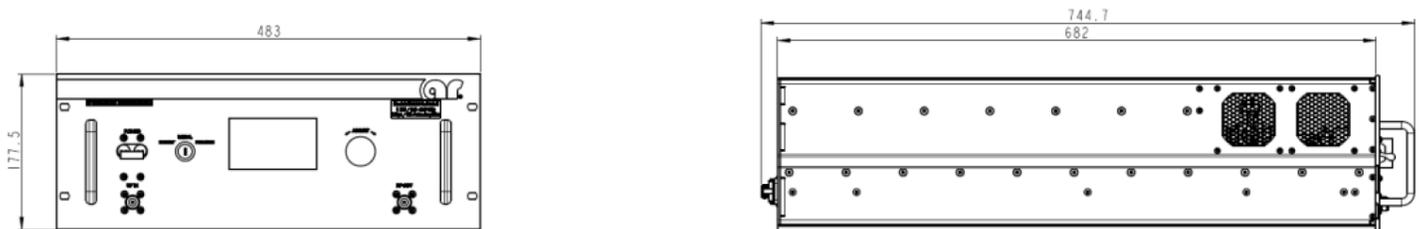


Units=mm; base model 1500/1000SP1z2G3z1 shown




Model 1500/1000SP1z2G3z1

- 1500/1000 W
- 1.2 – 1.4 GHz/2.7 - 3.1 GHz

Low Band Typical Output Power (Psat @ 0 dBm input)

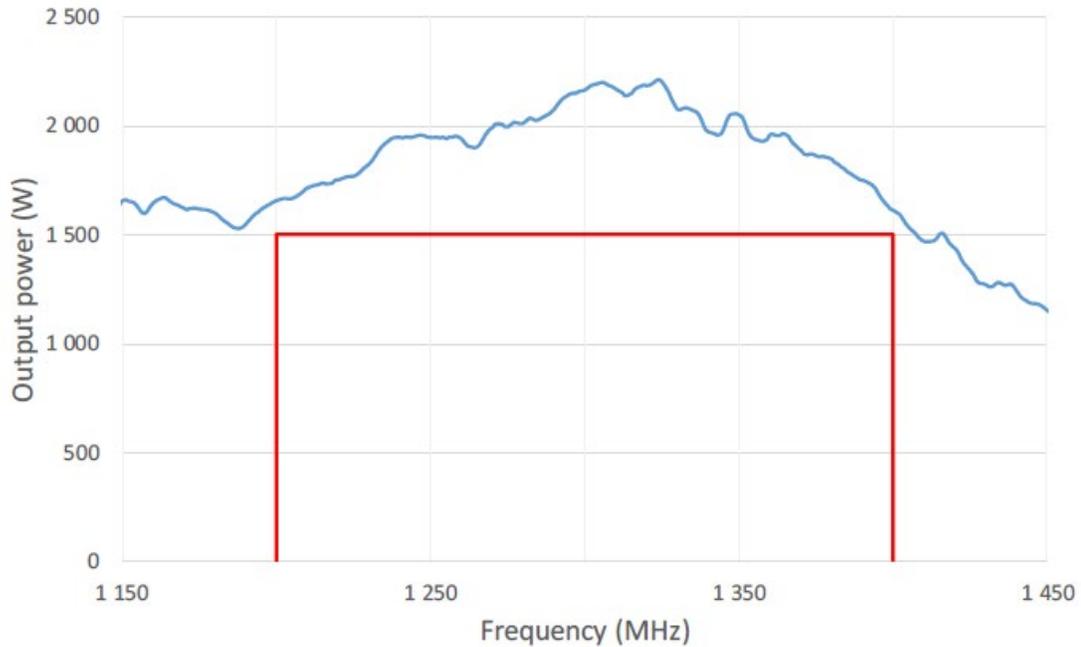

High Band Typical Output Power (Psat @ 0 dBm input)

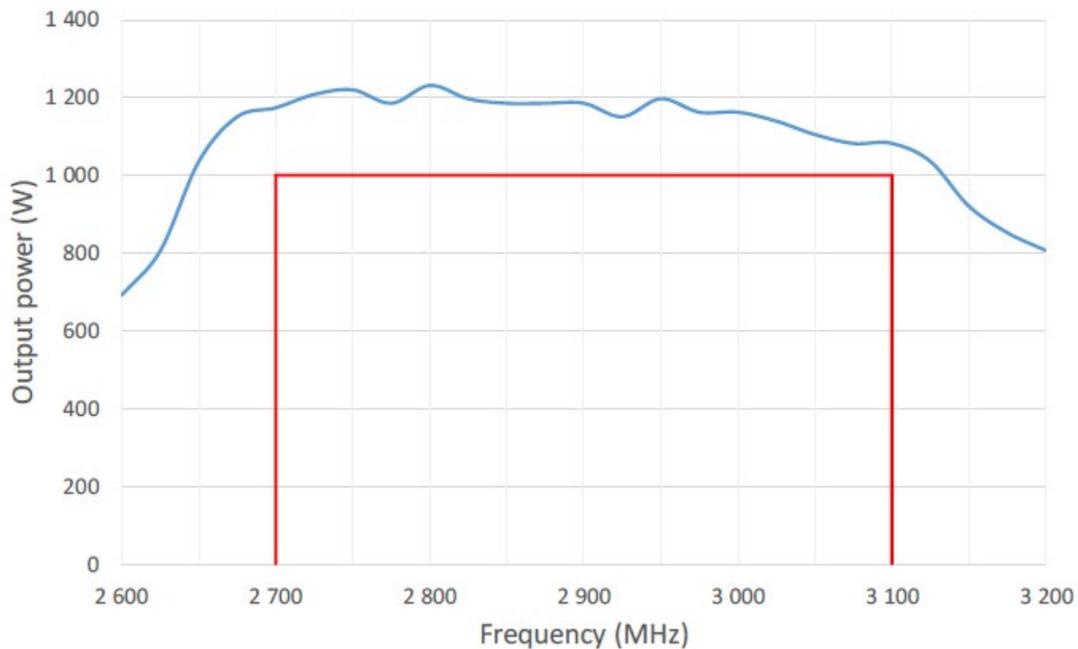

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964

To order AR Products, call: 215.723.8181. For an applications engineer, call: 800.933.8181. Direct to Service call: 215.723.0275 or email: service@arworld.us

For Faxing Orders: 866.859.0582 (Orders Only Please) info@arworld.us

Approved for public release by AR RF/Microwave Instrumentation ISO 9001:2015 Certified • ISO 17025:2017 Accredited

Revision 111821

