



15000SP1z2G1z4

- 15000 Watts Pulse
- 1.2GHz–1.4GHz

Features

The Model 15000SP1z2G1z4 is a self-contained, forced-air-cooled, broadband solid-state microwave amplifier designed for pulse applications at low duty factors where instantaneous bandwidth and high gain are required. The unit provides a conservative 15000 watts minimum peak RF pulse power at the amplifier output connector. Stated power specifications are at the fundamental frequency.

The Model 15000SP1z2G1z4 is equipped with a Digital Control Panel (DCP) which provides both local and remote control of the amplifier. The DCP uses a color LCD touch screen and a single rotary knob to offer status reporting and control capability. The display provides Forward Power and Reflected Power values plus amplifier status. Special features include a gain control and RF output level protection.


All amplifier control functions and status indications are available remotely in GPIB/IEEE-488

format, and Ethernet. The buss interface connector is located on the back panel and positive control of local or remote operation is assured by a keylock on the front panel of the amplifier.

Housed in a stylish contemporary cabinet, the amplifier provides readily available pulsed RF power for a variety of applications in Test and Measurement, (including EMC RF pulse susceptibility testing), Industrial and University Research and Development, and Service applications. AR also offers a broad range of amplifiers for CW (Continuous Wave) applications.

The export classification for this equipment is 3A999.d. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

15000SP1z2G1z4 Typical Power Output

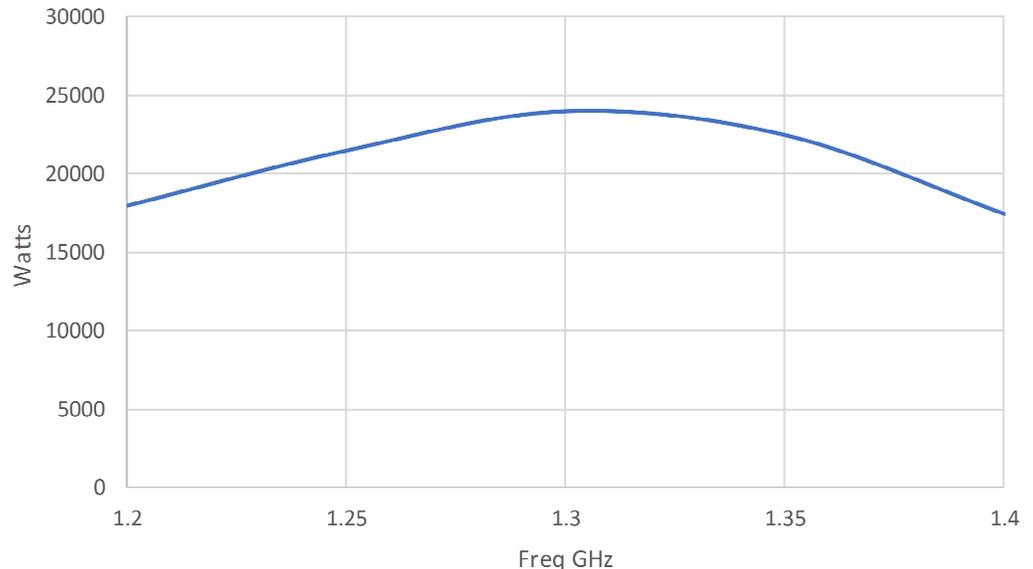

AR RF/Microwave
Instrumentation
160 School House Rd
Souderton, PA 18964
215-723-8181

For an applications engineer call:800.933.8181

www.arworld.us



15000SP1z2G1z4

- 15000 Watts Pulse
- 1.2GHz–1.4GHz

Specifications

RATED POWER OUTPUT: 15000 watts minimum
INPUT FOR RATED OUTPUT: 1.0 milliwatt maximum
PULSE DROOP: –0.5dB max @15000W for a 50 μ s pulse
FLATNESS: \pm 1.0 dB typical; \pm 2.0 dB maximum
FREQUENCY RESPONSE: 1.2–1.4 GHz instantaneously
GAIN (at maximum setting): 72 dB minimum
GAIN ADJUSTMENT: Continuous Range 20 dB minimum, (4096 steps remote)
INPUT IMPEDANCE: 50 ohms, VSWR 2.0:1 maximum
OUTPUT IMPEDANCE: 50 ohms, nominal
MISMATCH TOLERANCE: Output pulse width foldback protection at peak reflected power exceeding 7500 watts. Will operate without damage or oscillation when connected to any load impedance.
PULSE CAPABILITY:
Pulse Width 0.1–50 microseconds
Pulse Rate (PRF) 50 kHz maximum
Duty Cycle 6% maximum
RF Rise and Fall 30 ns max (10% to 90%).
Delay 1 μ s maximum from pulse input to RF 90%
Pulse Width Distortion \pm 20 ns maximum (difference between TTL Input Gate and RF pulse)
Pulse Off Isolation 60 dB minimum
Pulse Input TTL level, 50 ohm nominal termination

NOISE FIGURE: 8 dB maximum
HARMONIC DISTORTION: Minus 30 dBc max
SPURIOUS: Minus 60 dBc Typ.
PRIMARY POWER: 100-264 VAC, 50/60 Hz, single phase, 7500 watts maximum
CONNECTORS:
RF: See Model Configurations
RF output forward and reflected sample ports: Type N female, rear
PULSE INPUT: Type BNC female, rear
REMOTE INTERFACES:
IEEE-488: 24 pin
Ethernet: RJ-45
SAFETY INTERLOCK: 15 pin Subminiature D
COOLING: Forced air (self contained fans)
SIZE & WEIGHT: See Model Configurations
EXPORT CLASSIFICATION: 3A999.d

MODEL CONFIGURATIONS

MODEL NUMBER	RF INPUT	RF OUTPUT	WEIGHT	SIZE (W x H x D)
15000SP1z2G1z4	N (f), front	7-16 DIN (f), rear	117 kg (258 lbs)	50.3 x 51.1 x 80 cm, 19.8 x 20.4 x 31.5 in
15000SP1z2G1z4M1	N (f), rear	7-16 DIN (f), rear	117 kg (258 lbs)	50.3 x 51.1 x 80 cm, 19.8 x 20.4 x 31.5 in
15000SP1z2G1z4M2	Same as 15000SP1z2G1z4 with enclosure removed for rack mounting		110 kg (243 lbs)	48.3 x 48.8 (11U) x 77.5 cm, 19 x 19.2 (11U) x 30.5 in
15000SP1z2G1z4M3	Same as 15000SP1z2G1z4M1 with enclosure removed for rack mounting		110 kg (243 lbs)	48.3 x 48.8 (11U) x 77.5 cm, 19 x 19.2 (11U) x 30.5 in