



# AR System

## Model SSIEC30V3M

- 80 MHz – 6 GHz
- 54 V/m CW up to 3 Meter Test Distance
- 1.5 x 1.5 Meter UFA

### Features:

- Customized to meet your needs
- Performance guarantee
- Global support and service

### Application Standards:

- IEC 61000-4-3 Testing

The SSIEC30V3M System is designed to develop a 1.5 x 1.5 meter uniform field area (UFA) of up to 54 V/m CW up to a 3 m test distance for IEC 61000-4-3 testing from 80 MHz – 6 GHz. The signal generation, control, and power monitoring equipment shall be mounted in a ventilated equipment rack along with the RF amplifiers.

The SSIEC30V3M AR System consists of the AR equipment, listed herein. Please refer to individual product specification sheets for details.

The export classification for this equipment is 3A001. This equipment is controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

AR Standardized Systems are customizable upon request. Contact AR for all such requests.

To view our full portfolio, visit:  
[www.arworld.us/systems](http://www.arworld.us/systems)

AR RF/Microwave Instrumentation  
160 Schoolhouse Rd  
Souderton, PA 18964  
215.723.8181  
info@arworld.us  
www.arworld.us  
ISO 9001:2015 Certified  
ISO 17025:2017 Accredited



Model SSIEC30V3M

- 80 MHz - 6 GHz
- 54 V/m CW to 3 meters

## Model SSIEC30V3M System Summary Requirements

Parameter	Description
System Frequency Range	80 MHz – 6 GHz
CW Field Strength	54 V/m CW (30 V/m w/80% AM per IEC 61000-4-3)
Test Distance	Up to 3 Meters
UFA	1.5 x 1.5 meters per IEC 61000-4-3
Amplifier Configuration	Two RF amplifiers were chosen for this test system: Model 1000W1000H: 80 MHz – 1000 MHz, 1000 W Model 500S1G6C: 1 – 6 GHz, 500 W
Antenna Configuration	Dedicated antennas for each amp to provide optimal field generation and field uniformity: Model ATR80M6GM2: 80 – 1000 MHz Model ATT700M8G: 1 – 6 GHz bands
RF Cable Configuration	Two sets (one for each amp/antenna) consisting of 2 and 5 meter lengths and designated bulkhead feedthroughs for each set.
Software Configuration	System and testing will be controlled using emcware® software which is preloaded and delivered on a new PC as part of overall system.
Design Approach	Self-contained equipment rack with internal pre-wired RF and power with automatic RF switching via SCP2000. AC power is filtered and distributed through an internal power distribution unit. All RF equipment input and outputs are on rear-panel of devices.
Installation, Site Acceptance Testing (SAT) and Training	One week of installation, SAT and Training will be provided by AR Systems Engineers
Export Classification	3A001
Assumptions: Field Strength calculations are based on free-space conditions.	



Model SSIEC30V3M

- 80 MHz - 6 GHz
- 54 V/m CW to 3 meters

## Model SSIEC30V3M Equipment List

Component	Quantity
Model 1000W1000H-R-N-R-N-NE, Amplifier, 80 – 1000 MHz, 1000 W CW	1
Model 500S1G6C-R-N-R-716-NE-SPR, Amplifier, 1 – 6 GHz, 500 W CW	1
Model DC6280AM1, Dual Directional Coupler, 80 – 1000 MHz, 1500 W CW	1
Model DC7215A, Dual Directional Coupler, 1 – 6 GHz, 750 W CW	1
Model SCP2000M3, System Controller, DC – 18 GHz	1
Model PM2003, Power Meter	1
Model PH2000A, Power Head, 10 kHz – 8 GHz	2
Signal Generator, 9 kHz – 6 GHz (Keysight N5171B-506 with options -1EM, -UNT, -UNW, -1CM110A)	1
Model FM7004AM1 Field Monitor, 4 channel	1
Model FL8009/KitM1 Electric Field Probe, 20 MHz – 9.3 GHz, 0.5-800 V/m	1
Model PS2000B, Probe Stand	1
Model ATR80M6GM2, Radiant Arrow Antenna, 80 MHz – 6 GHz, 5000 W CW	1
Model ATT700M8G, Trapezoidal Log Periodic, 700 MHz – 8 GHz, 600 W CW (or equivalent)	1
Model 10006774, Antenna Adapter for TP1000B with ¼”-20 thread bolt to antenna	1
Model TP1000B, Non-metallic Tripod	1
All internal interconnect cables between system components	Included
Model BF7160, Bulkhead Feed-through, Type 7/16 female	2
Model CC41313020, Low Loss Coaxial cable, 7/16 male connectors, 2 m	2
Model CC41313050, Low Loss Coaxial cable, 7/16 male connectors, 5 m	2
Test System Control PC	1
Model emcware® Radiated Susceptibility, Conducted Immunity, and Emissions Test Software*	1
emcware® 1-year support contract*	1


\*Model emcware® and service contract to be quoted as separate line items and are therefore not included in the price of the system.



Model SSIEC30V3M

- 80 MHz - 6 GHz
- 54 V/m CW to 3 meters

### SSIEC30V3M System Racks

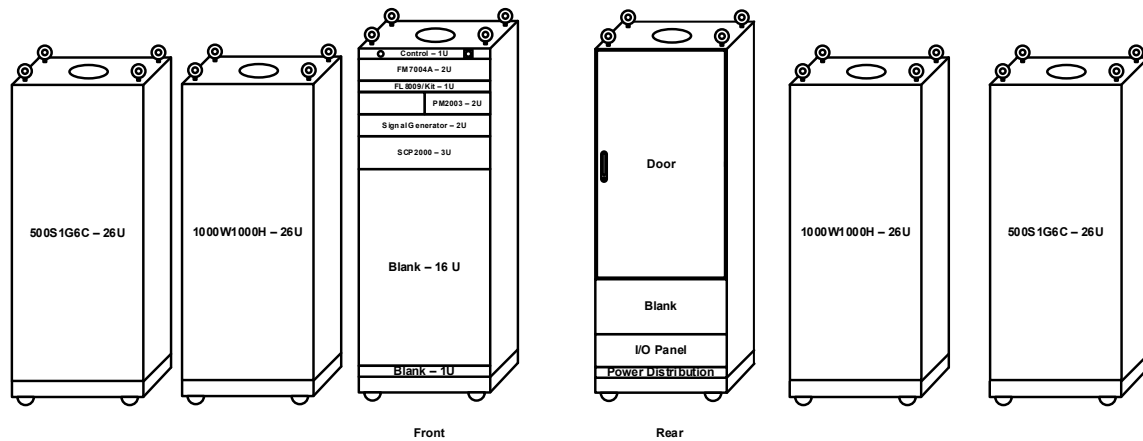

Control Rack Specifications		Units
Size (H x W x D)	150.52 x 56.03 x 91.44	cm
	59.26 x 22.06 x 36	in
Weight	50	kg
	110	lb
Power Input	240 VAC, 1-phase, 30 A	

500S1G6C Specifications		Units
Size (H x W x D)	57.3 x 136.0 x 67.1	cm
	22.6 x 53.5 x 26.5	in
Weight	177	kg
	390	lb
Power Input	240 VAC, 1-phase, 30 A	

1000W1000H Specifications		Units
Size (H x W x D)	57.3 x 136.0 x 67.1	cm
	22.6 x 53.5 x 26.5	in
Weight	156	kg
	343	lb
Power Input	240 VAC, 1-phase, 30 A	

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964

To order AR Products, call: 215.723.8181. For an applications engineer, call: 800.933.8181. Direct to Service call: 215.723.0275 or email: [service@arworld.us](mailto:service@arworld.us)

For Faxing Orders: 866.859.0582 (Orders Only Please) [info@arworld.us](mailto:info@arworld.us)

Approved for public release by AR RF/Microwave Instrumentation ISO 9001:2015 Certified • ISO 17025:2017 Accredited

Revision 042723

