



# AR System

## Model SSISOC50V10K18G

- 10 kHz – 18 GHz
- 50 V/m at 1 Meter Test Distance

### Features:

- Customized to meet your needs
- Performance guarantee
- Global support and service

### Application Standards:

- ISO 11452-2 Component Testing
- ISO 11452-5 Component Testing

The SSISOC50V10K18G System is designed to generate up to 50 V/m CW at a 1m test distance for ISO 11452-2 full-vehicle testing from 10 kHz-18 GHz. The signal generation, control, and power monitoring equipment shall be mounted in a ventilated equipment rack along with the RF amplifiers.

The SSISOC50V10K18G AR System consists of the AR equipment, listed herein. Please refer to individual product specification sheets for details.

The export classification for this equipment is 3A001. This equipment is controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

AR Standardized Systems are customizable upon request. Contact AR for all such requests.

To view our full portfolio, visit:  
[www.arworld.us/systems](http://www.arworld.us/systems)

AR RF/Microwave Instrumentation  
160 Schoolhouse Rd  
Souderton, PA 18964  
215.723.8181  
info@arworld.us  
www.arworld.us  
ISO 9001:2015 Certified  
ISO 17025:2017 Accredited



Model SSISOC50V10K18G

- 10 kHz - 18 GHz
- 50 V/m at 1 meter

## Model SSISOC50V10K18G System Summary Requirements

Parameter	Description
System Frequency Range	10 kHz – 18 GHz
CW Field Strength	50 V/m
Test Distance	1 Meter
Amplifier Configuration	Four (4) RF amplifiers were chosen for this test system: Model 100A400A, Amplifier, 10 kHz – 400 MHz, 400 W CW Model 250W1000C: 80 – 1000 MHz, 250 W Model 75S1G6C-R-N-R-N-NE, RF Amplifier, 1 – 6 GHz, 75 W CW Model 40S6G18-L-R-N-R-N-NE-U, RF Amplifier, 6 – 18 GHz, 40 W CW
Antenna Configuration	Dedicated antennas for each amp to provide optimal field generation: Stripline Antenna, DC – 1000 MHz (Schwarzbeck TEMZ 5232 or equivalent) Model ATR80M6G, Log-periodic Antenna, 80 MHz – 6 GHz Model DRH-118, Horn Antenna, 1 – 18 GHz
RF Cable Configuration	Three sets (one for each amp/antenna) consisting of 2 and 5 meter lengths and designated bulkhead feedthroughs for each set.
Software Configuration	System and testing will be controlled using emcware® software which is preloaded and delivered on a new laptop as part of overall system. Price includes a 1 year support contract.
Design Approach	Self-contained equipment rack with internal pre-wired RF and power with automatic RF switching via SCP2000. AC power is filtered and distributed through an internal power distribution unit. All RF equipment input and outputs are on rear-panel of devices.
Installation, Site Acceptance Testing (SAT) and Training	One week of installation, SAT and Training will be provided by AR Systems Engineers
Export Classification	3A001
Assumptions: 3 dB power margin on amplifiers to accommodate reasonable chamber and system losses. Field Strength calculations are based on free-space conditions.	



Model SSISOC50V10K18G

- 10 kHz - 18 GHz
- 50 V/m at 1 meter

### Model SSISOC50V10K18G Equipment List

Component	Quantity
Model 100A400A-R-N-R-N-NE-R-U, Amplifier, 10 kHz – 400 MHz, 100 W CW	1
Model 250W1000C-R-N-R-N-NE, RF Amplifier, 80 MHz – 1 GHz, 250 W CW	1
Model 75S1G6C-R-N-R-N-NE, RF Amplifier, 1 – 6 GHz, 75 W CW	1
Model 40S6G18-L-R-N-R-N-NE-U, RF Amplifier, 6 – 18 GHz, 40 W CW	1
Model DC3400A, Dual Directional Coupler, 10 kHz – 400 MHz, 250 W	1
Model DC6180A, Dual Directional Coupler, 80 MHz – 1 GHz, 600 W	1
Model DC7205A, Dual Directional Coupler, 0.7 – 6 GHz, 250 W	1
Model DC7435A, Dual Directional Coupler, 4 – 18 GHz, 200 W	1
Stripline Antenna, DC – 1000 MHz (Schwarzbeck TEMZ 5232 or equivalent)	1
Model ATR80M6G, Log-periodic Antenna, 80 MHz – 6 GHz, 2000 W CW	1
Model DRH-118, Horn Antenna, 1 – 18 GHz	1
Model TP1000BM4, Non-metallic Tripod	1
Model SCP2000M1, System Controller, DC – 18 GHz	1
Signal Generator, 9 kHz – 20 GHz (Keysight N5173B-520 with options -1EM, -UNT, -UNW, -1E1, -UK6, -1CM110A)	1
Model PM2003, Power Meter, 3 channels	2
Model PH2000A, Power Head, 10 kHz – 8 GHz, -60 to +20 dBm	2
Model PH2005, Power Head, 500 kHz – 18 GHz, -70 to +20 dBm	2
Model FM7004AM1, Field Monitor	1
Model FL8018/KitM1, Field Probe, 20 MHz – 18 GHz, 2 – 1000 V/m	1
Model FL8200/KitM1, Field Probe, 5 kHz – 200 MHz, 0.3 – 500 V/m	1
Model PS2000B, Probe Stand, Non-Conductive	1
Model CC11111020, Coaxial Cable, DC – 18 GHz, N connectors, 2 m long	3
Model CC11111050, Coaxial Cable, DC – 18 GHz, N connectors, 5 m long	3
All internal Interconnect cables between system components	1
Test System Control PC	1
Model emcware®, Radiated Susceptibility, Conducted Immunity, and Emissions Test Software*	1
emcware®, 1-year support contract*	1


\*Model emcware® and service contract to be quoted as separate line items and are therefore not included in the price of the system.



Model SSISOC50V10K18G

- 10 kHz - 18 GHz
- 50 V/m at 1 meter

**SSISOC50V10K18G Racks**

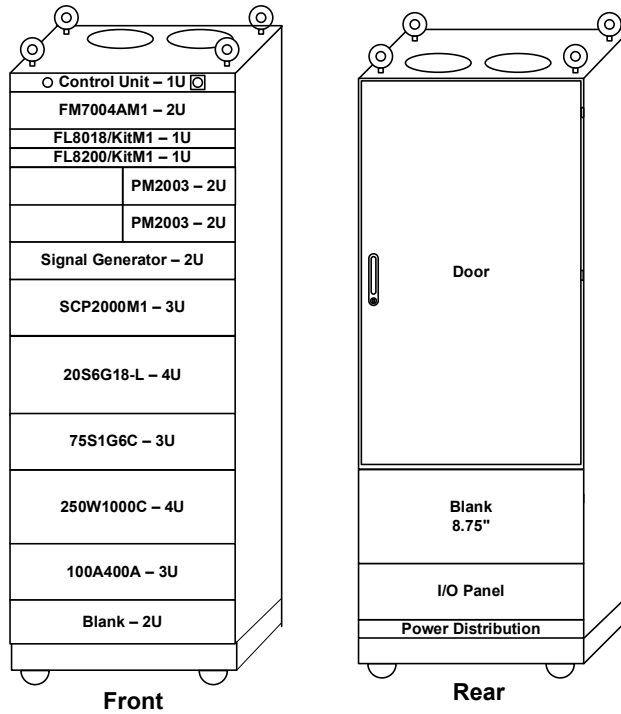

Control Rack Specifications		Units
Size (H x W x D)	152.4 x 56.0 x 97.5	cm
	60.0 x 22.1 x 38.4	in
Weight	136.4	kg
	300	lb
Power Input	240 VAC, 1-phase, 30 A	

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964

To order AR Products, call: 215.723.8181. For an applications engineer call: 800.933.8181. Direct to Service call: 215.723.0275 or email: [service@arworld.us](mailto:service@arworld.us)

For Faxing Orders: 866.859.0582 (Orders Only Please) [info@arworld.us](mailto:info@arworld.us)

Approved for public release by AR RF/Microwave Instrumentation ISO 9001:2015 Certified • ISO 17025:2017 Accredited

Revision 033122

