



AR System

Model SSMIL200V10K18G

- 10 kHz – 18 GHz
- 200 V/m at 1 Meter Test Distance

Features:

- Customized to meet your needs
- Performance guarantee
- Global support and service

Application Standards:

- MIL-STD-461D/E/F/G Testing

To view our full portfolio, visit:
www.arworld.us/systems

The SSMIL200V10K18G System is designed to develop a 200 V/m field level at a 1 m test distance for MIL-STD-461D/E/F/G testing from 10 kHz to 18 GHz. The signal generation, control, and power monitoring equipment shall be mounted in a ventilated equipment rack along with the RF amplifiers.

The SSMIL200V10K18G AR System consists of the AR equipment, listed herein. Please refer to individual product specification sheets for details.

The export classification for this equipment is 3A001. This equipment is controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

AR Standardized Systems are customizable upon request. Contact AR for all such requests.

AR RF/Microwave Instrumentation
160 Schoolhouse Rd
Souderton, PA 18964
215.723.8181
info@arworld.us
www.arworld.us
ISO 9001:2015 Certified
ISO 17025:2017 Accredited



Model SSMIL200V10K18G

- 10 kHz - 18 GHz
- 200 V/m at 1 meter

Model SSMIL200V10K18G System Summary Requirements

Parameter	Description
System Frequency Range	10 kHz - 18 GHz
CW Field Strength	200 V/m
Test Distance	1 meter
Amplifier Configuration	Four (4) RF amplifiers were chosen for this test system: Model 2500A225C: 10 kHz - 225 MHz, 2500 W Model 500W1000C: 80 - 1000 MHz, 500 W Model 125S1G6C: 1 - 6 GHz, 125 W Model 75S6G18C: 6 - 18 GHz, 75 W
Antenna Configuration	Dedicated antennas for each amp to provide optimal field generation: Model ATE10K30MAM2, Field Generator, 10 kHz - 30 MHz Model TDK HPBA-2510 (or equivalent), Antenna, 25 - 100 MHz Model ATR80M6GM2, Log-periodic Antenna, 80 MHz - 6 GHz Model ATH200M2G, Horn Antenna, 200 MHz - 2 GHz Model ATH800M6G, Horn Antenna, 1 - 6 GHz Model ATH6G18A, Horn Antenna, 6 - 18 GHz
RF Cable Configuration	Four sets (one for each amp/antenna) consisting of 2 and 5 meter lengths and designated bulkhead feedthroughs for each set.
Software Configuration	System and testing will be controlled using emcware® software which is preloaded and delivered on a new PC as part of overall system.
Design Approach	Self-contained equipment rack with internal pre-wired RF and power with automatic RF switching via SCP2000. AC power is filtered and distributed through an internal power distribution unit. All RF equipment input and outputs are on rear-panel of devices.
Installation, Site Acceptance Testing (SAT) and Training	One week of installation, SAT and Training will be provided by AR Systems Engineers
Export Classification	3A001
Assumptions: 3 dB power margin on amplifiers to accommodate reasonable chamber and system losses. Field Strength calculations are based on free-space conditions.	



Model SSMIL200V10K18G

- 10 kHz - 18 GHz
- 200 V/m at 1 meter

Model SSMIL200V10K18G Equipment List


Component	Quantity
Model 2500A225C-R-N-R-716-SPR-XX , RF Amplifier, 10 kHz – 225 MHz, 2500 W	1
Model 500W1000C-R-N-R-N-NSP-NE , RF Amplifier, 80 MHz – 1 GHz, 500 W	1
Model 125S1G6C-R-N-R-N-NE-SPR, RF Amplifier, 1 – 6 GHz, 125 W	1
Model 75S6G18C-R-N-R-N-NE-U, RF Amplifier, 6 – 18 GHz, 75 W	1
Model DC2035A, Dual Directional Coupler, 10 kHz – 225 MHz, 3500 W	1
Model DC6180A, Dual Directional Coupler, 80 MHz – 1 GHz, 600 W	1
Model DC7205A, Dual Directional Coupler, 700 MHz – 6 GHz, 250 W	1
Model DC7435A, Dual Directional Coupler, 6 – 18 GHz, 200 W	1
Model ATE10K30MAM2, Field Generator, 10 kHz – 30 MHz	1
Antenna, 20 – 100 MHz, 3000 W CW (TDK HPBA-2010)	1
Model ATR80M6GM2, Log-periodic Antenna, 80 MHz – 6 GHz, 2000 W	1
Model ATH200M2G, Horn Antenna, 200 MHz – 2 GHz, 1000 W	1
Model ATH800M6G, Horn Antenna, 1 – 6 GHz, 1500 W	1
Model ATH6G18A, Horn Antenna, 6 – 18 GHz, 650 W	1
Model AD1502, Adapter, WRD-650 to N (female)	1
Model AM8000, Adapter, Antenna Mounting	1
Model AM7000A, Adapter, Antenna Mounting	1
Model AM9000, Adapter, Antenna Mounting	2
Model TP1000B, Non-metallic Tripod	1
Model SCP2000M3, System Controller, DC – 18 GHz	1
Signal Generator, 9 kHz – 20 GHz (Keysight N5173B-520 with options -1EM, -UNT, -UNW, -1E1, -UK6, -1CM110A)	1
Model PM2003, Power Meter, 3 channels	2
Model PH2000A, Power Head, 10 kHz – 8 GHz, -60 to +20 dBm	2
Model PH2005, Power Head, 500 kHz – 18 GHz, -70 to +20 dBm	2
Model FM7004AM1, Field Monitor	1
Model FL8200/KitM1, Field Probe, 5 kHz – 200 MHz, 0.3 – 500 V/m	1
Model FL8018/KitM1, Field Probe, 20 MHz – 18 GHz, 2-1000 V/m	1
Model PS2000B, Probe Stand, Non-Conductive	1
Model CC11111020, Coaxial Cable, DC – 18 GHz, N connectors, 2 m long	3
Model CC11111050, Coaxial Cable, DC – 18 GHz, N connectors, 5 m long	3
Model CC41313020, Coaxial Cable, DC – 6 GHz, 7/16 DIN connectors, 2 m long	1
Model CC41313050, Coaxial Cable, DC – 6 GHz, 7/16 DIN connectors, 5 m long	1
All internal Interconnect cables between system components	1
Test System Control PC	1
Model emcware® Radiated Susceptibility, Conducted Immunity, and Emissions Test Software*	1
emcware® 1-year support contract*	1

*Model emcware® and service contract to be quoted as separate line items and are therefore not included in the price of the system



Model SSMIL200V10K18G

- 10 kHz - 18 GHz
- 200 V/m at 1 meter

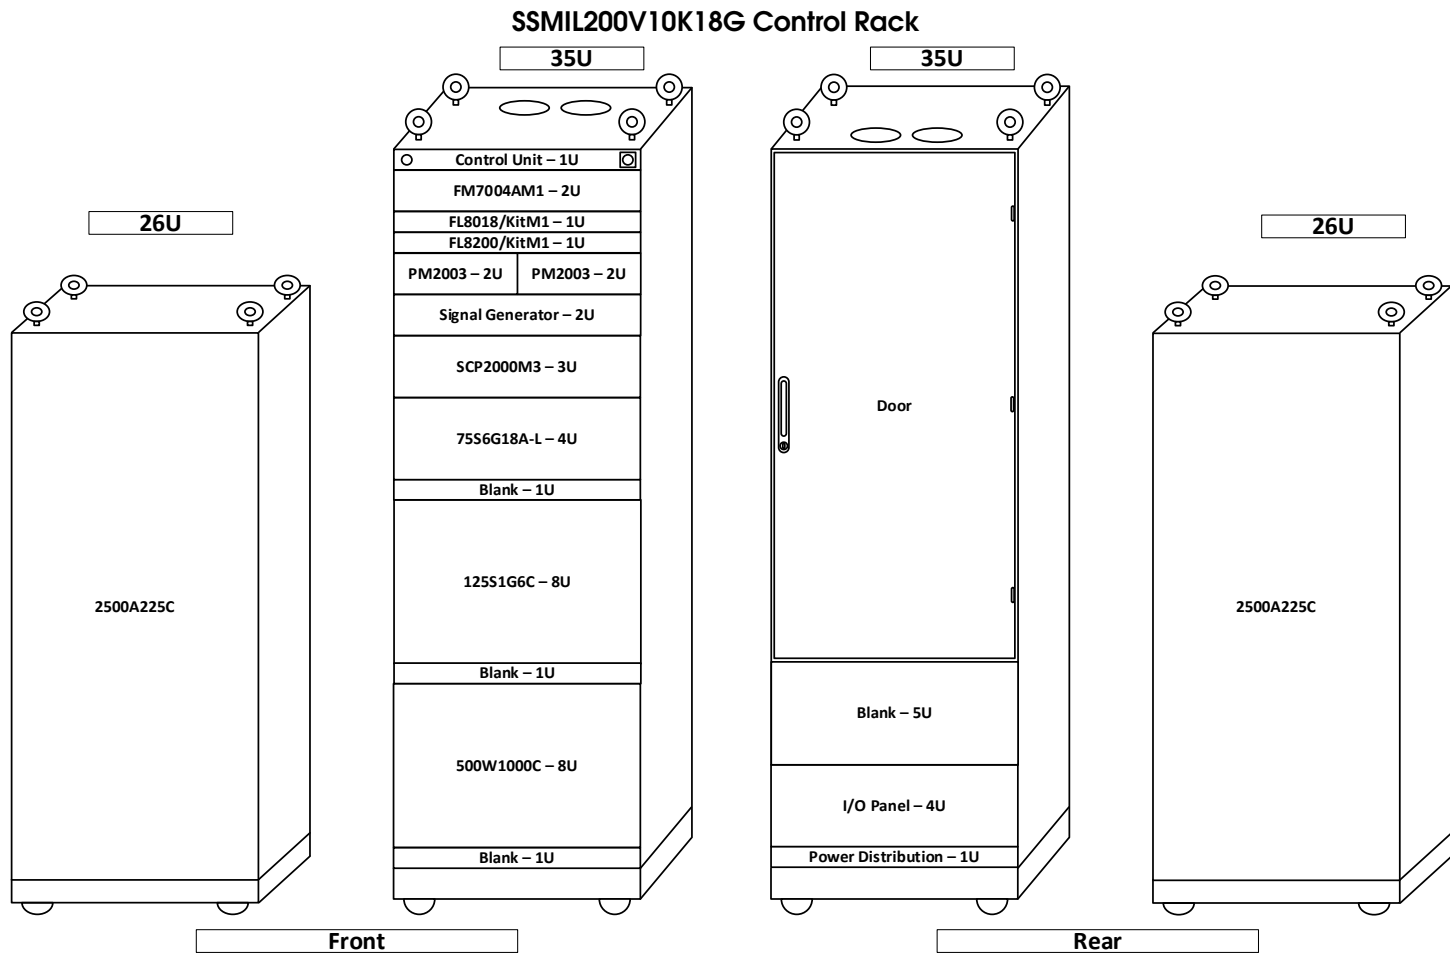

Control Rack Specifications		Units
Size (W x H x D)	57.3 x 150.8 x 93.7	cm
	22.6 x 59.4 x 36.9	in
Weight	241.5	kg
	532.5	lb
Power Input	240 VAC, 1-phase, 30 A	

2500A225C Amplifier Rack Specifications		Units
Size (W x H x D)	57.4 x 136 x 67.3	cm
	22.6 x 53.5 x 26.5	in
Weight	204	kg
	450	lb
Power Input	200 - 240 VAC or 380 - 415 VAC, 3-phase, 8.5 kW maximum	

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964

To order AR Products, call: 215.723.8181. For an applications engineer, call: 800.933.8181. Direct to Service call: 215.723.0275 or email: service@arworld.us

For Faxing Orders: 866.859.0582 (Orders Only Please) info@arworld.us

Approved for public release by AR RF/Microwave Instrumentation ISO 9001:2015 Certified • ISO 17025:2017 Accredited

Revision 022323

